

High Island IV

270 Foot Jack-Up

General Description

Design	Marathon LeTourneau 82-SD-C
Year Built / Last Upgrade	
Hull Dimensions	
Legs (3)	
Quarters Capacity	110 persons
Maximum Water Depth	
Cantilever Envelope	47 ft. by 20 ft. (with 7 ft. extension)
Maximum Variable Load (drilling)	Approx. 5,000 kips*
* . I	w denth and meanwarking lagetics

*depending on water depth and geographical location

Drilling Equipment

Derrick	Continental Emsco 160 ft. x 30 ft. x 30 ft. derrick, static hook load capacity 1,000,000 lbs. with twelve (12) lines
Drawworks	National 1320 UE, 2,000 HP rated input power, driven by two (2) GE 752 series DC motors outfitted with Baylor 7838 auxiliary electric brake
Rotary Table	National C-375, 37-1/2 in. driven by an independent DC electric motor with two speed gear box
Top Drive	NOV TDS 3H, 500 short tons, rated to 34,700 ft. lbs maximum continuous torque, outfitted with a Varco PH-85 pipe-handler
Pipe Handling	NOV ST-80 for handling tubular ranging from 4-1/2 in. to 8-1/2 in OD.
Mud Pumps	Two (2) National 12-P-160 triplex pumps 1,600 hp, each driven by two (2) GE 752 DC motors, rated to 5,000 psi working pressure
Solids Control	Three (3) Brandt VSM 300 shale shakers plus one (1) Brandt VSM 300 shale shaker equipped with $2 \times 12^{"}$ desander cones and one (1) Brandt Model 24/3 mud cleaner with 24 x 3" cones


ласк-ор			
Storage Capacities			
Liquid Mud	2,249 bbls. (including slug tanks)		
Base Oil	932 bbls.		
Drill Water	6,612 bbls.		
Fuel	2,287 bbls.		
Bulk Mud	5,100 cu. ft.		
Bulk Cement	3,400 cu. ft.		
Power Equipment			
Main Power	Four (4) Caterpillar D-399TA 1,215 HP engines driving four (4) Kato 1,030 KW 600 volt AC generators plus one (1) Caterpillar 3516C engines driving a Kato 1,525 KW 600 volt AC generator		
Power Dist.	Four (4) Ross Hill SCR units, 1,850 amps each, 750 volts, powering seven (7) drilling motors		
BOP Equipment			
Diverter	Shaffer 21-1/4 in. 2K annular with two (2) 7-1/16" 2K hydraulic gate valves & two (2) 12" discharge lines		
BOP Stack	13-5/8 in. 10,000 psi WP BOP stack consisting of one (1) Shaffer LXT double ram preventer, one (1) Shaffer LXT single ram preventer and one Shaffer 13-5/8 in. 5,000 psi WP annular preventer		
BOP Handling	Four (4) Ingersoll Rand hoists and trolley system, rated to 60 short tons		
Cranes			
Three (3) Marathon LeTourneau PCM-120AS hydraulic electric cranes, 100 ft. booms, rated for 50 short tons at 24 ft. radius			
	Special Features		

A seven (7) ft. cantilever extension is available to increase the cantilever maximum skid out distance to 47 ft.





These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Shelf Drilling policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.

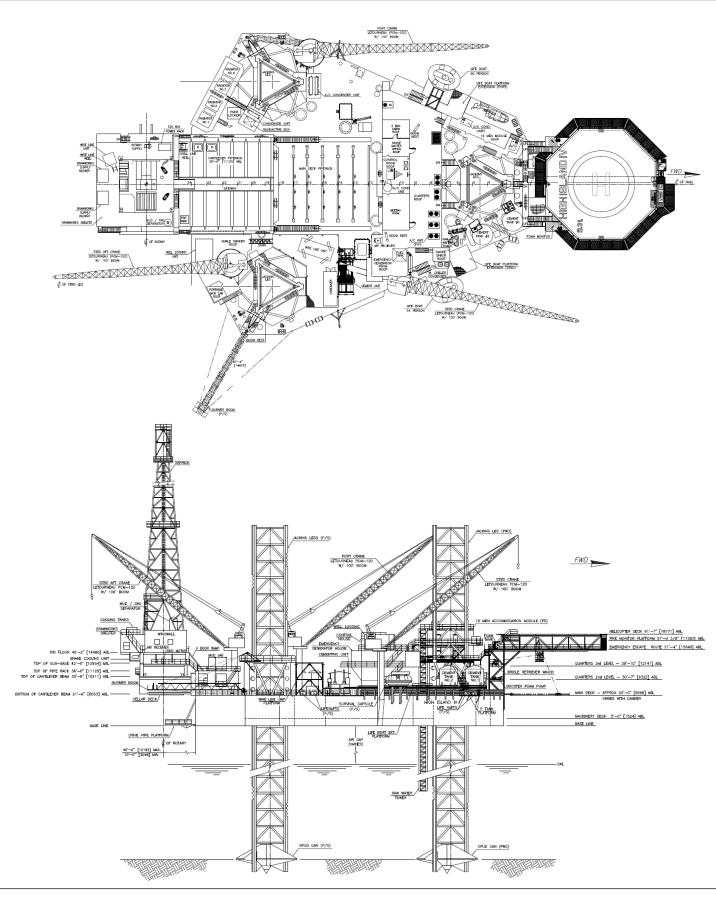

High Island IV



These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Shelf Drilling policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.

R-Mar-2025